



**CHUCK**


# 6-Jaw Finger Chuck for Motorcycle Wheels

## FG-M series

Finger Chuck ideally suited for aluminium wheel machining for motorcycles


● High Stability

The floating mechanism ensures firm chucking.

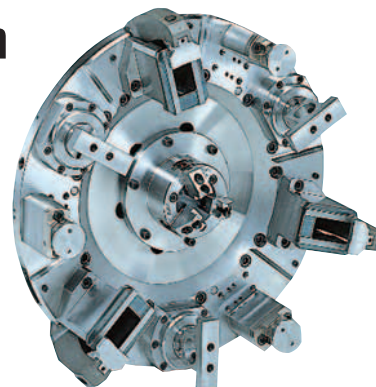


Advanced Chuck

### Gripping Examples

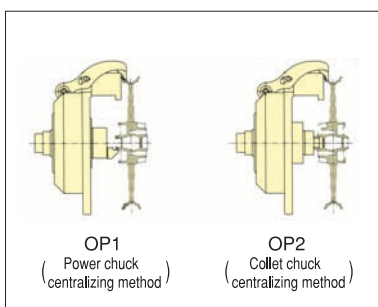

### Dimensional Drawings

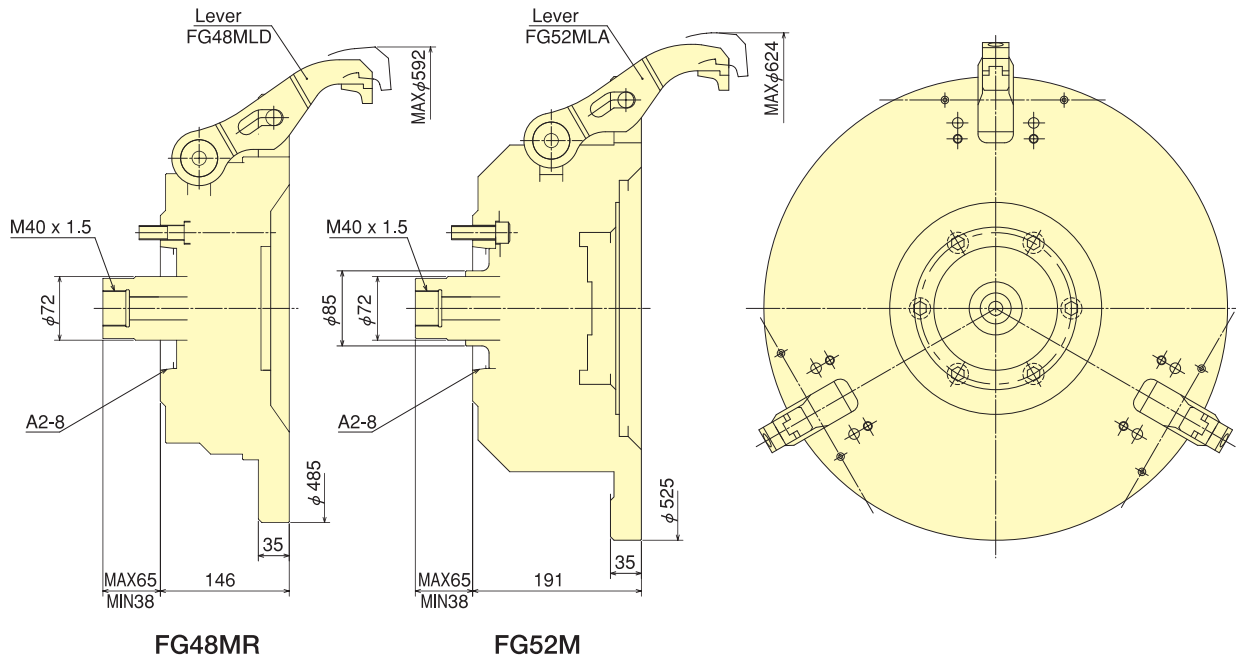

### Dimensions

Model	Specs	Max. Draw Bar Pull Force kN(kgf)	Max. Speed min <sup>-1</sup>	Net Weight kg	Moment of inertia kg · m <sup>2</sup>	Open jaw stroke/Clamping stroke mm	Gripping force/jaw kN(kgf)
FG48MR		12.0 (1224)	2500	91.0	1.780	14/13	3.5 (357)
FG52M		21.0 (2141)	2500	130.0	3.650	14/13	6.5 (663)

### Measurement table for Wheel

Model	Wheel size	12"	13"	14"	15"	16"	17"	18"	19"	20"	21.5"	22.5"
FG48MR		○	○	○	○	○	○	○	○			
FG52M		○	○	○	○	○	○	○	○			